

USER MANUAL

F₂



Remote controller

Design comes from life

F2-S

User manual

Thank you for purchasing our products. Please read the following information carefully in order to fully use the product.



Product features

This is an infrared controlled LED Flood Light with 120 degree angle, which is suitable for daily lighting, atmosphere lighting and decorative lighting.



Characteristics of IR remote control

- When using the remote, there is need to align to infrared signal acceptor.
- Made from high-end materials, it can cross such as cloth, glass, etc, but can't cross wall and metal.




Precautions


- Please be sure to cut off the power before inserting or removing the lamp from holder.
- Not compatible with dimmers, the light will appear flashing, timing inaccuracy, shifting mode instability, etc.
- For the first time use, please remove the insulation slip from the remote control.
- If the control can't work, please try to remove the battery and insert it into. If there is no remote, please email us to solve the problem.



IR signal acceptor

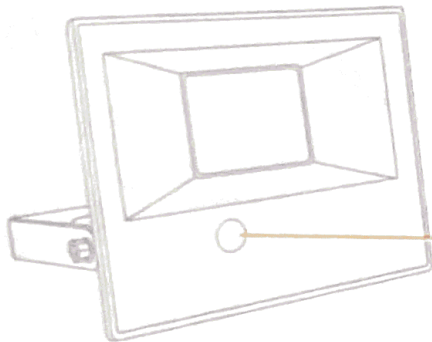

IR signal acceptor

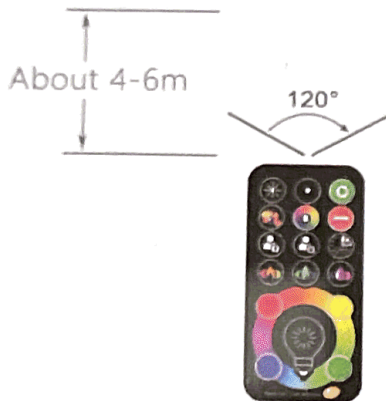

The radiation-emitting angle of the remote control is 120° in front of the receiver, the distance should be within 4-6 meters.

(Please point the remote control directly to the IR signal acceptor, no barrier blocking between the remote and light.)

Dim up
(speed up
"DIY-FLASH")

DIY-FLASH

Store key

Daily lighting



Dim down
(speed down
"DIY-FLASH")

Smooth

Timer








Cozy

Fresh

Romantic



Features

-     Those are preset programs, just one key to start.
-   The brightness of static color can be adjusted.
-  Colors can be programmed, the rhythm of color changing can be changed.

Instruction of program:

(1) Long press () until the light goes out.

(2) You can select the exsisting 7 colors.



and can select repeatedly, but up to 10 times.

(3) Press () confirm and start.



The rhythm of color changing can be changed.




Timer, repeated everyday



Operation :

(1) Before setting the timer function, you should determine the color you need. If you need to change it, please change the color when you press the timer button.

(2) Press () one time means one hour, two times means two hours, and so on.

(3) Press () confirm and start.

e.g. I need the light turn on with red color at 6 p.m, turn off at 12 p.m, repeated everyday.

Operate as follows at 6 p.m:


(1) Set the light to red.

(2) Press () 6 times .

(3) Press ()

• **Delete the timer :**

(1) Cut off the power .

(2) Press () 5 times, and the light will flash one time.



Color Wheel

- You can select the color from the 4 buttons of color wheel, until your favorite appears.
- Long press means change rapidly, tap means fine adjustment.



Store key

The color on the color wheel can be stored, one key to start when needed.

Operation tepts:

(1) Press () OR ()

(2) Press the buttons of the color wheel until your favorite appears. Press the store key when you need next time.



If you find any problems that can't not be solved or any suggestion to improve the products when using, please feel free to contact us, our after-sales team will offer you a 100% perfect service at any time.